

FIG. 1 (PRIOR ART)

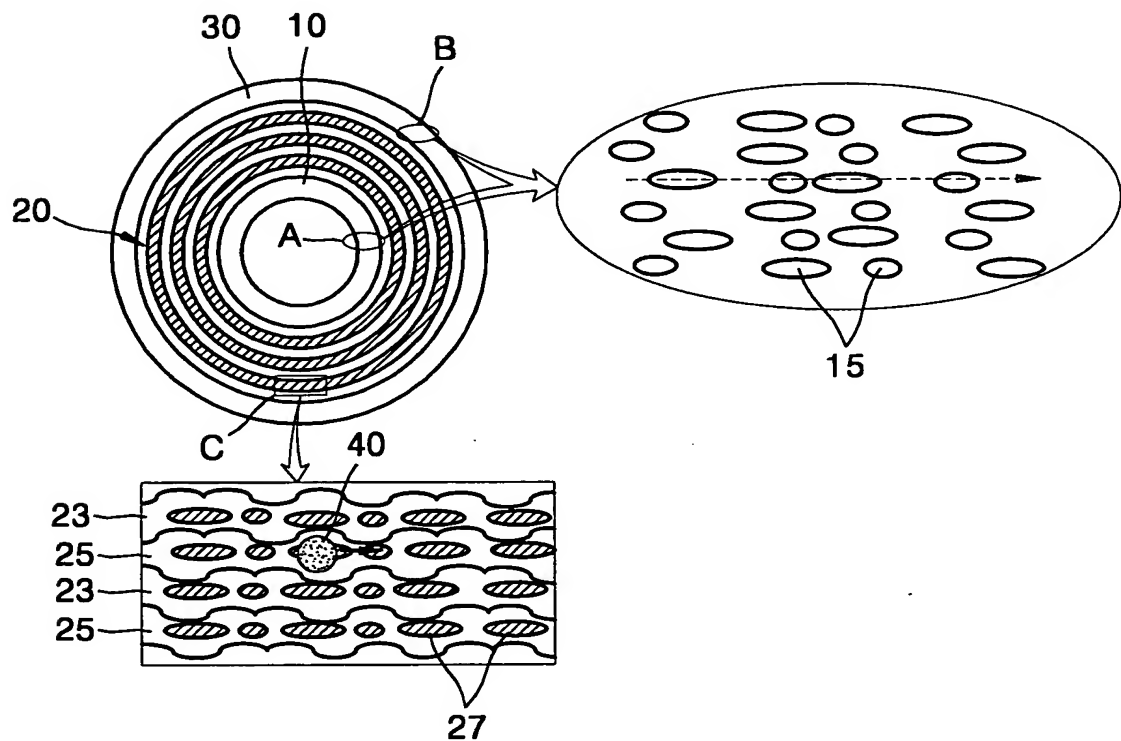


FIG. 2 (PRIOR ART)

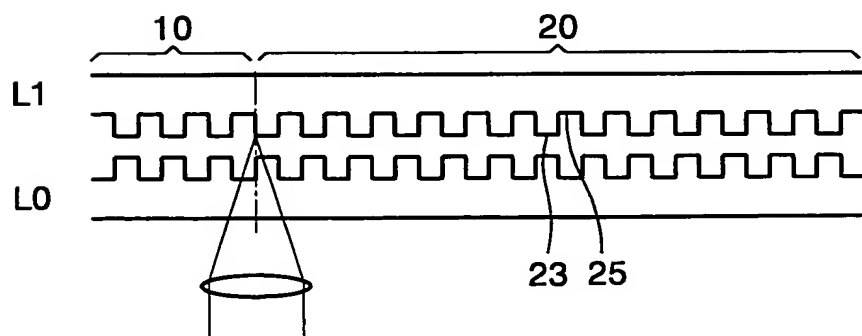


FIG. 3A (PRIOR ART)


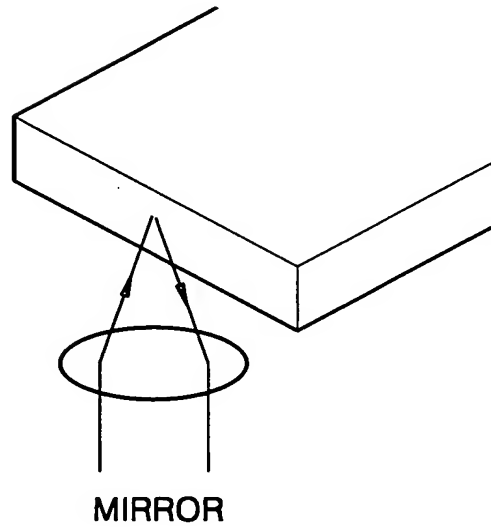


FIG. 3B (PRIOR ART)

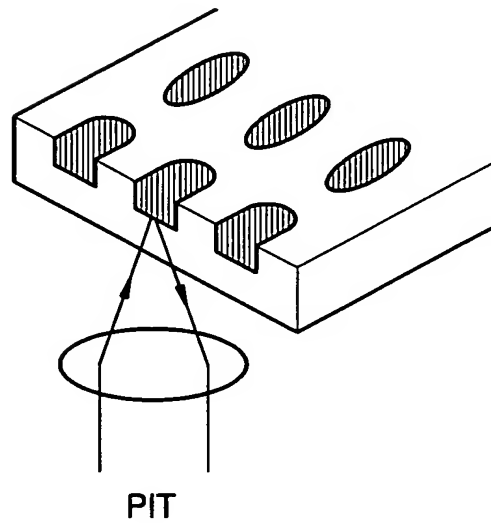

TITLE: OPTICAL RECORDING MEDIUM WITH
DIFFERENT WOBBLE
CHARACTERISTICS BETWEEN THE ...
INVENTORS: Du-Seop Yoon, et al.
SERIAL NO.: Unassigned
DOCKET NO.: 1293.1279C2

TITLE: OPTICAL RECORDING MEDIUM WITH

FIG. 3C (PRIOR ART)

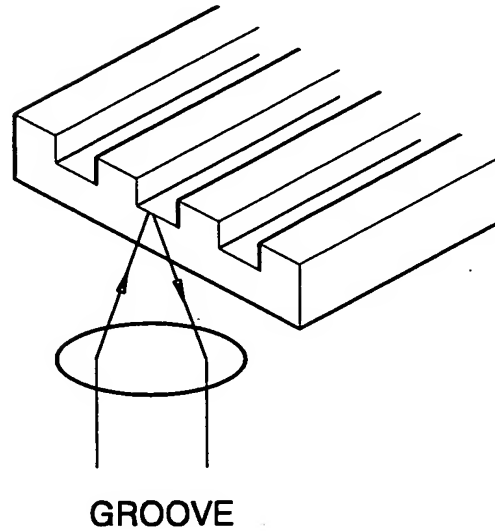


FIG. 3D (PRIOR ART)


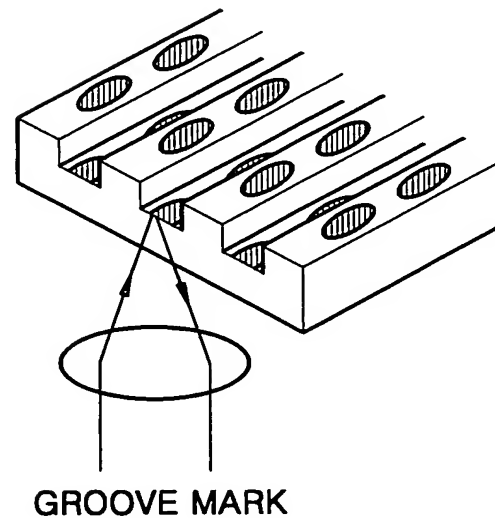


FIG. 4 (PRIOR ART)

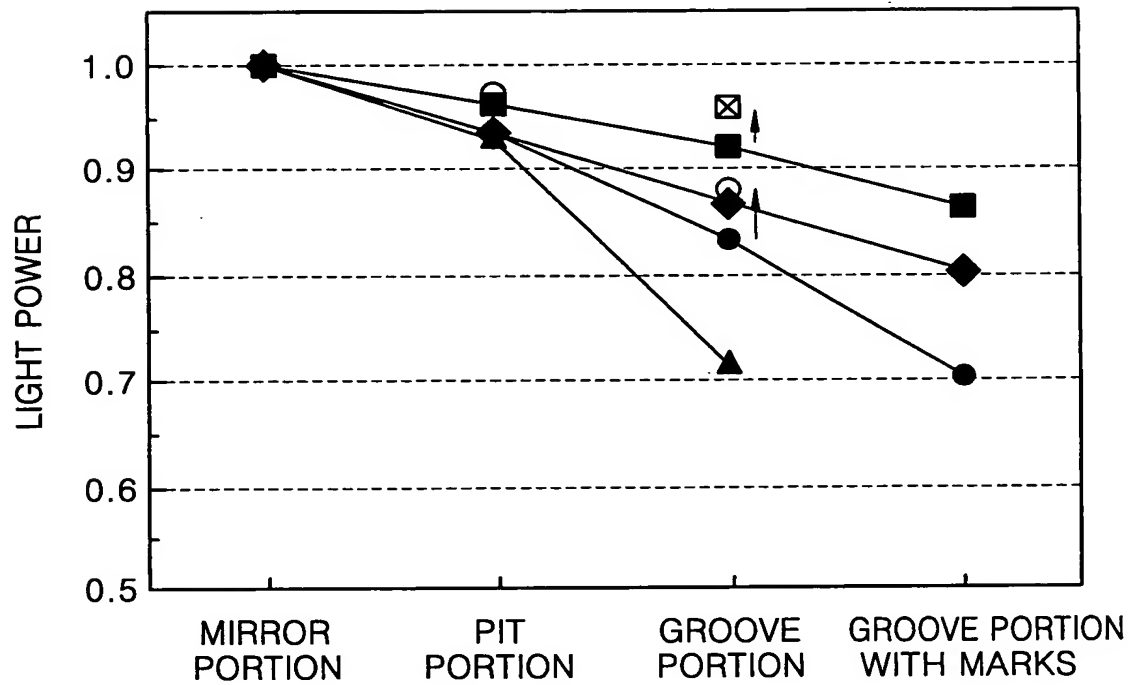

$\lambda = 400\text{nm}$, $\text{NA} = 0.65$

—▲— TP=0.30 μm

—●— TP=0.34 μm

○ EXPERIMENTAL
DATA

—■— TP=0.38 μm

⊠ EXPERIMENTAL
DATA

$\text{NA} = 0.85$

—◆— TP=0.30 μm

FIG. 5

